Global Leading Solution Provider In Electrical Autom

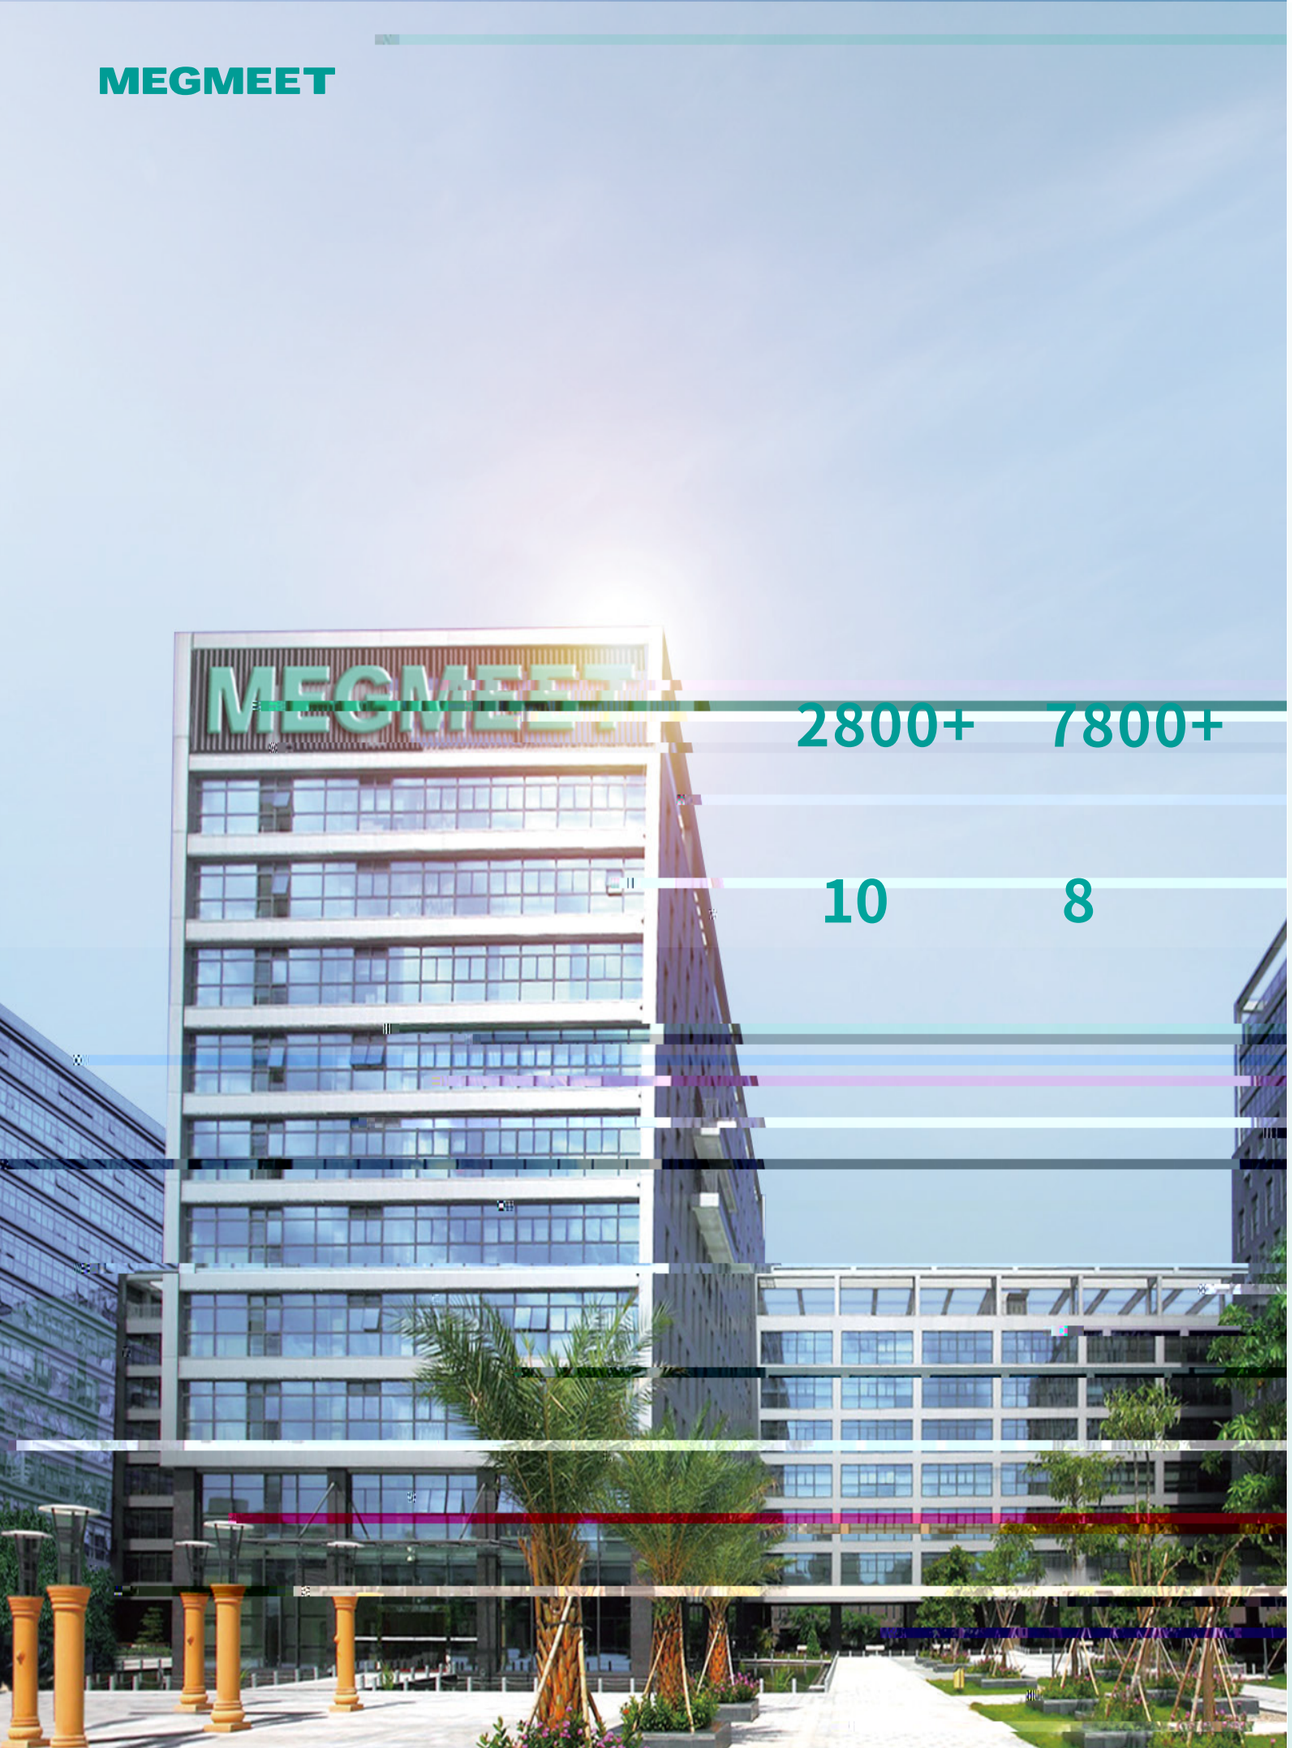

Contents

Medium PLC

MC6000
MC5000

Small PLC

MU300
MU200
MC280/200E
MC200
MC100

MC700 Series Motion Controller

MC700 Series Motion Controller

Remote I/O Module

MC5000S Remote I/O Module

MLINK

Mlink Remote Wireless Module

Intelligent Temperature Controller

MTC/MTCW/MTCV/MTCE/MDT/MQT Series

Cable List

Cable List

HMI

MZ800 Series

MEGMEET

conforms to PLCopen specification and IEC61131-3 standard.

Built-in 200KHz high-speed I/O(8 * DI+8 * DO)

16MB program capacity, 16MB data capacity, 256MB storage capacity, 64KB+4KB retention on power down

µ

■ Based on pulse output: 2M difference 100K collector, 8PO expansion, control up to 38 pulse axis

and 100K-step standard program executes no more than 2.2ms

320K-step program capacity, 2M Byte C language, 2M Byte data capacity

MC5	0	0	0	E	A	16
	0 Bus controller 1 Pulse controller 2 General controller	0 Cluster terminal 1 Euroblock	M: MECHATROLINK-III* C: CANopen* P: Profibus*	B: 4-axis collector 200K pulse output		

*

MEGMEET

-

-

significantly improved based on ARM+FPGA

- Support 8-channel 200K high-speed pulse output and single-phase pulse count, or 4-channel 100K AB-phase, CW/CCW, pulse+direction

-

*

MEGMEET

MU200 new generation of small PLC uses ARM+FPGA dual-core processor for the powerful processing function,

-
-

-
-

-
-
-

GMEET

-
-
-

MEGMEET

MEGMEET

-
-

-
-

MEGMEET

meet the diversified choices of customers.

Digital quantity, analog quantity, temperature and other modules can be configured randomly

MEGMEET

MEGMEET